



## Clamp fire rated LED downlight

Q-TD2121W (White)


Q-TD2121CH (Chrome)

Q-TD2121SN (Satin Nickel)

### DESCRIPTION:

- IP65 suit for bathroom Zones ①√ ②√ ③√
- BS476 fire-rated standard available
- Optimal heat dissipation less than 50° in center
- Exchangable bezel for convenient painting & installing
- Separate colorful bezels save storage capital


### DIMENSIONS:

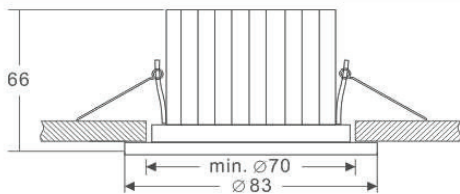

### TECHNICAL SPECIFICATION

Model No.	Q-TD2121				
Beam Angle	40°				
Lifetime	40,000hr				
Input Voltage	AC220-240V/50/60Hz				
LED driver	TUV certificate non-dimmable driver (CE Dimmable driver optional)				
Power Factor	>0.8				
Operating Temperature	-5°~50°				
Light Source	SHARP				
Power consumption(W)	PColor Temperature	Luminous(lm)	Current(mA)	Output watt	CRI
10W	>100lm/w	550	230	8	82
	>100lm/w	575	230	8	82
	>100lm/w	645	230	8	82
Fixture material	Diameter	Cut out	Void	IP	Fire-rated
Pure alu.	φ83mm	φ70mm	66mm	65	optional
Colorful bezel	Shinny white	Matt white	Silver grey	Sand silver	Smooth alu.
	Satin nickle	Chrome	Antique brass	Gold	Pearl chrome

66mm	83mm	70mm	Pure Aluminium	COB 10W	Output 550~650lm	CCT 2700-5000K	Ra>80
IP65	40° Beam Angle	Fixed	TUV External LED driver	Fire-rated	Bezel exchangable	50 pcs	0.041 m³

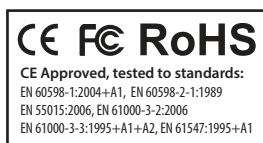

**POWERSAVE SOLUTIONS LTD**

HEAD OFFICE: Unit 7, The Sandon Estate, Sandon Way, Liverpool L5, 9YN

LONDON OFFICE: 17 Highgate Hill, Hill House - 9th Floor, N19 5NA

e-mail: [info@powersavesolutions.co.uk](mailto:info@powersavesolutions.co.uk) [facebook.com/powersavesolutions](https://www.facebook.com/powersavesolutions) [www.powersavesolutions.co.uk](http://www.powersavesolutions.co.uk)