



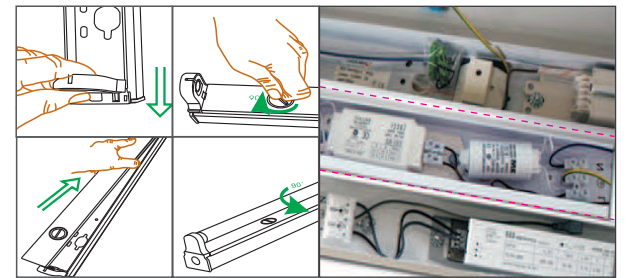

**SPECIFICATIONS:**

- **Housing:** thickness of 0.4-0.6mm high quality cold-steeling rolling plate. Per surface processing with degreasing, surface-conditioning, pickling, phosphating, rinsing, static spraying(anti-UV powder), 180-210°C high temperature curing, products have strong color adhesion and a smooth surface.
- **Advantages:** Scientifically designed, easy used products can better satisfy the different lighting requirement of modern fashion and has an extremely decorative lighting effect.
- **Accessories:** A. A. G. Stucchi, Vossloh of VDE approved lamp holder; A. A. G. Stucchi, Tridonic or VDE approved terminal block; 0.75mm heat resistant 105°C UL or VDE approved wire; 1.2m-2.6m VDE approved or SAA approved cable plug. All comply with requirements of IEC standards and RoHS directives.
- **Ballast:** Osram, Philips, Tridonic, Helvar DALI Ballast: Philips, Tridonic or Helvar Emergency kits: Tridonic(3 hours).
- **Lamp:** Philips, Osram( 3000K/4000K/6000K).

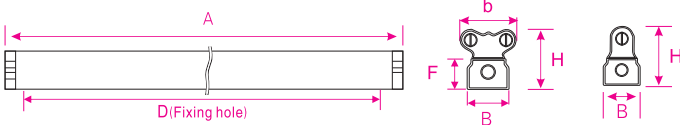

Product Code	Model	Body material	Lamp	Lamp holder	Dimension(mm)				MEAS(mm) 1PCS
					AXBXH	D	b	F	
Z608000012	Q-TH118-1	0.4-0.6mm steel	1X18W	G13	620X55X85	450	—	50	635X63X93
Z608000013	Q-TH218-1	0.4-0.6mm steel	2X18W	G13	620X95X85	450	75	50	635X63X93
★ Z608000014	Q-TH136-1	0.4-0.6mm steel	1X36W	G13	1230X55X85	1050	—	50	1245X63X93
★ Z608000015	Q-TH236-1	0.4-0.6mm steel	2X36W	G13	1230X95X85	1050	75	50	1245X103X93
Z608000016	Q-TH158-1	0.4-0.6mm steel	1X58W	G13	1530X55X85	1260	—	50	1545X63X93
Z608000017	Q-TH258-1	0.4-0.6mm steel	2X58W	G13	1530X95X85	1260	75	50	1545X63X93
Z608000093	Q-TH170-1	0.4-0.6mm steel	1X70W	G13	1780X55X85	1450	—	50	1795X63X93
Z608000095	Q-TH270-1	0.4-0.6mm steel	2X70W	G13	1780X95X85	1450	75	50	1795X63X93