






SPECIFICATIONS:

- **Housing:** 0.6-1mm cold rolled steel sheet. Surface treatment adopts multi steps processing such as degreasing, surface conditioning, phosphating, rinsing, static spraying with anti-UV powder and 180-210°C high temperature curing, to form the smooth, elegant and durable surface. It is corrosion resistant and not easy to discolor.
- **Reflector:** Alanod anodized aluminum in Specular 320G or Matt 1100G (thickness of 0.4mm), or higher level Miro4 Silver, Miro5 Silver, Miro6 Silver, Miro7 Silver, Miro8 Silver. Louver scientifically designed, provides excellent lighting without glare. Reflectivity of the grating is up to 85%-95%, high efficiency.
- **Advantages:** Scientifically designed, products can better satisfy the different lighting requirement of modern fashion and has an extremely decorative lighting effect.
- **Accessories:** A.A.G. Stucchi, Vossloh or VDE approved lamp holder; A.A.G. Stucchi, Tridonic or VDE approved terminal block; 0.75 mm² heat resistant 105°C UL or VDE approved wire; 1.2m-2.6m VDE approved or SAA approved cable plug are all available to supply. All comply with requirements of IEC standards and RoHS directives.
- **Ballast:** Osram, Philips, Tridonic, Helvar DALI Ballast: Philips, Tridonic or Helvar.
- **Emergency kits:** Tridonic (3 hours).
- **Lamp:** Philips, Osram (3000K/4000K/6000K).

Luminous Intensity Distribution Diagram

Model: TB236V (Alanod 320G)
Lamps: 2x Osram L36W/840

Luminous Flux: 3663.7Lm

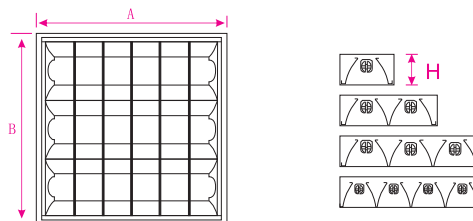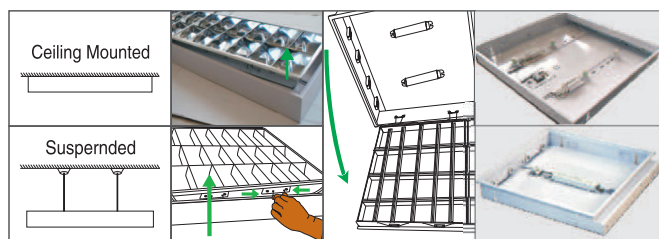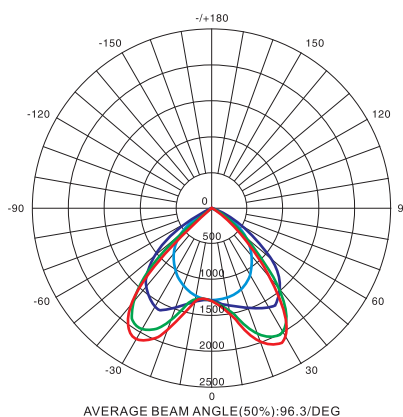

Product Code	Model	Body material	Lamp	Lamp holder	Dimension(mm) AXBXH	MEAS(mm) 1PCS
L682000034	Q-TB418V	0.6mm steel	4X18W	G13	624X595X85	632X610X93
L682000035	Q-TB136V	0.6mm steel	1X36W	G13	1234X195X100	1249X225X115
★ L682000036	Q-TB236V	0.6mm steel	2X36W	G13	1234X295X85	1249X325X100
★ L682000037	Q-TB336V	0.6mm steel	3X36W	G13	1234X500X85	1249X530X100
L682000038	Q-TB436V	0.6mm steel	4X36W	G13	1234X595X85	1249X610X100
L682000039	Q-TB158V	0.6mm steel	1X58W	G13	1534X195X100	1549X225X115
L682000040	Q-TB258V	0.6mm steel	2X58W	G13	1534X295X85	1549X325X100
L682000041	Q-TB458V	0.6mm steel	4X58W	G13	1534X545X85	1549X610X100