

Qlamp Floodlight 60W IP65 (Round Shape)

Q-ECO-RFL




DESCRIPTION:


- Ideal as flood lights with extremely low energy consumption yet super bright and powerful.
- Using aluminium alloy and ABS+PC components, recycling rate is more than 98.5%.
- No mercury, UV, IR and other toxic substances, it is environment-friendly.
- Different colors for choice warm white (2800-3500K), natural white (4000-4800K), cool white (5000-6500K), RGB.
- Reduced carbon footprint through high efficient energy saving operation.

APPLICATIONS:

- Parks, squares, gardens, bridges, etc, municipal decoration lighting projects.
- Outdoor advertising board lighting.
- Building contour outline profile lighting.
- Security/alarm/warning lighting.
- Parking lots/corner/sports ground lighting.

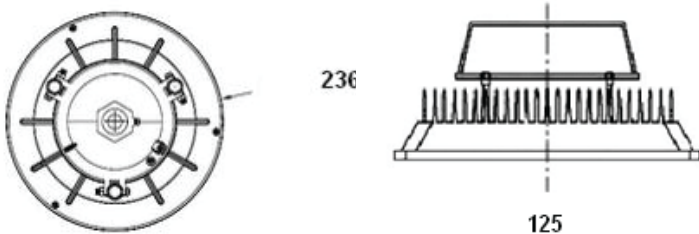

TECHNICAL SPECIFICATION	
Model No.	Q-ECO-RFL
LED Type	COB Bridgelux Chio
Luminous fluxΦ (lm)	5100±5%
Color Temperature	WW(2280~3500K)
	NW(4000~4800K)
	CW(5000~6500K)
Luminous Efficacy	85-90lm/W
CRI (Ra)	≥80
Beam Angle	140°
Flux Attenuation (%)	≤3% (3000hours)
Lifetime (LED)	≥50000Hrs
Input Voltage(V)	100-240VAC
Frequency (Hz)	50/60 Hz
Driver Type	Isolated/CC
Power (W)	60W
Power Factor	≥0.90
LED Power	55W
Turn on delay time (S)	≤1.2 S (@ 110Vac)
STRENGTH Hi-Pot	3000Vac/1min
LED Quantity	1pc
Certification	CE、PSE、FCC、RoHS
The surface color	Black/Grey
Material	aluminium alloy, ABS+PC
IP Level	IP65
Operating Temperature/Humidity	-25°C~45°C, 10%~ 90% R.H
Storage Temperature /Humidity	-25°C~45°C, 10%~ 90% R.H

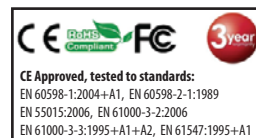

POWERSAVE SOLUTIONS LTD

HEAD OFFICE: Unit 7, The Sandon Estate, Sandon Way, Liverpool L5, 9YN

LONDON OFFICE: 152-154 Coles Green Road, NW2 7HD

e-mail: info@powersavesolutions.co.uk facebook.com/powersavesolutions www.powersavesolutions.co.uk