


## Qlamp Newest design LED panel

Q-MBD6060-40W



### DESCRIPTION:

- Domestic applications.
- General illumination.
- Indoor use.
- Very low energy consumption.
- Robust against vibrations.
- Extremely long life.
- No UV and near-IR radiation in the light beam.
- Can be easily fitted instead of ordinary light.
- Lower thermal output (compared with the standard reference product).
- SMD LED technology.
- Environmental friendly, no Mercury.
- Reduce electricity cost.
- Lifetime: up to 40000hours.

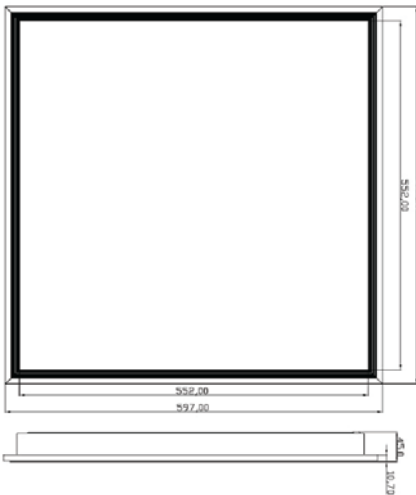

### TECHNICAL SPECIFICATION

Model No.	Q-MBD6060-40W
Rated wattage	40W
Nominal wattage	40W
Nominal voltage	100-240 V
Power factor $\lambda$	0.92
Operating frequency	50/60Hz
Nominal luminous flux	3700 lm 3800 lm 3800 lm
Rated luminous flux	3700 lm 3800 lm 3800lm
Color temperature	2700K 4000k 6000k
Color rendering index Ra	80
Starting time	1.0 s
Warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.70
Light color as per EN 12464-1	Warm White Nature White Pure White
Length*Width	597*597 mm
Height	45 mm
Nominal lamp life time	40000 h
Rated lamp life time	40000 h
Number of switching cycles	200000
New article	NEW
Design / version	Frosted
Appropriate disposal acc. to WEEE	Yes

