


Qlamp Newest design LED panel

Q-MBD60120-85W



DESCRIPTION:

- Domestic applications.
- General illumination.
- Indoor use.
- Very low energy consumption.
- Robust against vibrations.
- Extremely long life.
- No UV and near-IR radiation in the light beam.
- Can be easily fitted instead of ordinary light.
- Lower thermal output (compared with the standard reference product).
- SMD LED technology.
- Environmental friendly, no Mercury.
- Reduce electricity cost.
- Lifetime: up to 40000hours.

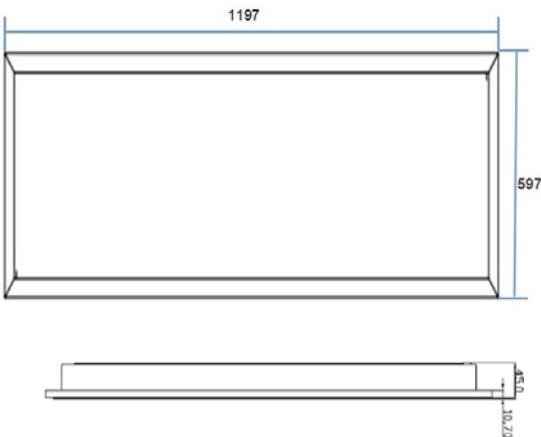

TECHNICAL SPECIFICATION

TECHNICAL SPECIFICATION	
Model No.	Q-MBD60120-85W
Rated wattage	85W
Nominal wattage	85W
Nominal voltage	100-240 V
Power factor λ	0.92
Operating frequency	50/60Hz
Nominal luminous flux	8150 lm 8250 lm 8250 lm
Rated luminous flux	8150 lm 8250 lm 8250 lm
Color temperature	2700K 4000k 6000k
Color rendering index Ra	80
Starting time	1.0 s
Warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.70
Light color as per EN 12464-1	Warm White Nature White Pure White
Length*Width	597*1197 mm
Lamp mercury content	0.0 mg
Mercury-free	Yes
Nominal lamp life time	40000 h
Rated lamp life time	40000 h
Number of switching cycles	200000
New article	NEW
Design / version	Frosted
Appropriate disposal acc. to WEEE	Yes

