



## Qlamp LED Floodlight 120W





Q-FL-60W2B

### DESCRIPTION:

This model of LED Floodlight is used to replace the Low Bay Luminaries, widely used in factories and warehouses.

**Energy saving, environment-friendly.**

Product Dimensions

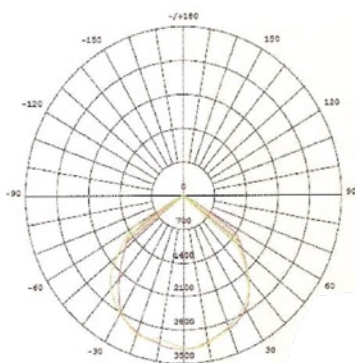

Light distribution curve

TECHNICAL SPECIFICATION		
Model No.	Q-FL-60W2B	
Input Voltage	AC 85~265V	
Frequency Range	50Hz~60Hz	
Power Factor	>0.98	
Power Efficiency	>87%	
LED Consumption	109W	
LED QTY	2pc*60W	
LED Working Voltage	DC 30~36V	
System Consumption	125 W	
LED Luminous Flux	Warm White	9600 LM
	Pure White	10800 LM
	Cool White	10800 LM
Lamp's Efficiency	≥85%	
Viewing Angle	120 or 45 degrees	
Average Illuminance	Height 6M	41.6 LUX
	Height 8M	23 LUX
	Height 10M	16 LUX
Illuminance Area	Height 6M	8*8 M
	Height 8M	11*11 M
	Height 10M	15*15 M
Illuminance Uniformity	>0.6	
Color Temperature	Warm White	2700K~3500K
	Pure White	4000K~5500K
	Cool White	6000K~7000K
Color Rendering Index	Warm White	Ra > 68
	PW, CW	Ra > 75
Light Distribution	Symmetric/Rectangular beam	
Light Design	LED+Light reflectors	
LED Junction Temperature	≥115°C	
Working Temperature	-40°C~50°C	
IP Grade	IP65	
Working Life-span	50,000hrs	
Power Line	0.75 mm <sup>2</sup> three-core	
Connect Wire	Brown	L
	Blue	N
	Yellow / Green	G
Shell Colour	Black	
Certificate	CE & RoHS	
Net Weight	11.2 Kg	

