

Qlamp LED ceiling light Emergency set with Microwave sensor Square 16W

Q-ML3008 - 5630



DESCRIPTION:



This is a newly designed intelligent ceiling mount microwave sensor LED lamp, with the extra function of power supply in emergency. The lighting is auto-managed by AC direct power or battery backup, that is, when power failure, the battery backup will be responsible for the power supply of 1 watt. The battery backup can continuously supply power for more than 3 hours or even more. It is widely applied in the corridor, washing room, elevator lobby etc. This product is designed with the emergency lamp and sensor function. In most cases, it is necessary and wise to choose the emergency sensor light, for that the occasional power outage will cause trouble, or even danger.

EMERGENCY FUNCTION

1. The unit will charge automatically (LED is green).
A single LED remains on when the supply is interrupted.
2. Verify that the Green LED is illuminated; this confirms that the batteries are charging.
3. Charge the battery for at least 24 hours before first use.
4. If the LED is not illuminated then there may be no a.c supply, the battery has not be connected properly or the internal circuit may have failed.
5. The battery should be re-charged and checked every three months.

TECHNICAL SPECIFICATION	
Model No.	Q-ML3008 - 5630
Dimension	280*280*87mm
Power	16W Max.(AC) 1W Max.(DC)
Power source	220-240V/AC
CCT	2700K-6400
Lumens Output	940lm(AC), 45lm(DC)
LED type	SMD5630, 36pcs
HF Sensor	
Time delay	6sec to 12min, adjustable
Light control	10-2000LUX
Detection range	2-10m(radii.), adjustable
Detection angle	360°
Housing Material	ABS body and PC diffuser
Battery	Emergency set, lithium battery, 1300mA, 3.7V
Continuous illumination time	≥ 120min
IP Rating	IP44

INDUCTION RANGE

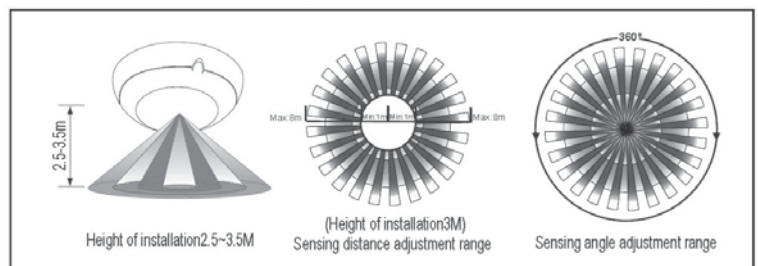

POWERSAVE SOLUTIONS LTD

HEAD OFFICE: Unit 7, The Sandon Estate, Sandon Way, Liverpool L5, 9YN

LONDON OFFICE: 152-154 Coles Green Road, NW2 7HD

e-mail: info@powersavesolutions.co.uk facebook.com/powersavesolutions www.powersavesolutions.co.uk